



SKK HOMES




VINYL MATT

Premium Grade Fungus and Alkaline Resistant Emulsion


VINYL MATT

Matt Finish Emulsion Paint

Rose White
VM 8001



Magnolia
VM 8324



Ginger Peachy
VM 8314



Dessert Orange ●
VM 8308


Lily White
VM 8009



Barley White
VM 8004



Cornfield ●
VM 8312



Popcorn ●
VM 8309

Apple White
VM 8305



Bluebell Classic
VM 8323



Just Jade
VM 8316



Cool Lime ●
VM 8310

Lilac White
VM 8304



Forever Blue
VM 8321



Mistral
VM 8318



Ashley Blue
VM 8315

Barely Pink
VM 8311



Cherry Blossom ●
VM 8319




Mulberry
VM 8317




Wild Violet ●
VM 8320

Orchid White
VM 8006



Bluebell White
VM 8306



Sand Stone
VM 8313





Chocolate
VM 8307

White



Stone Cave
VM 8322

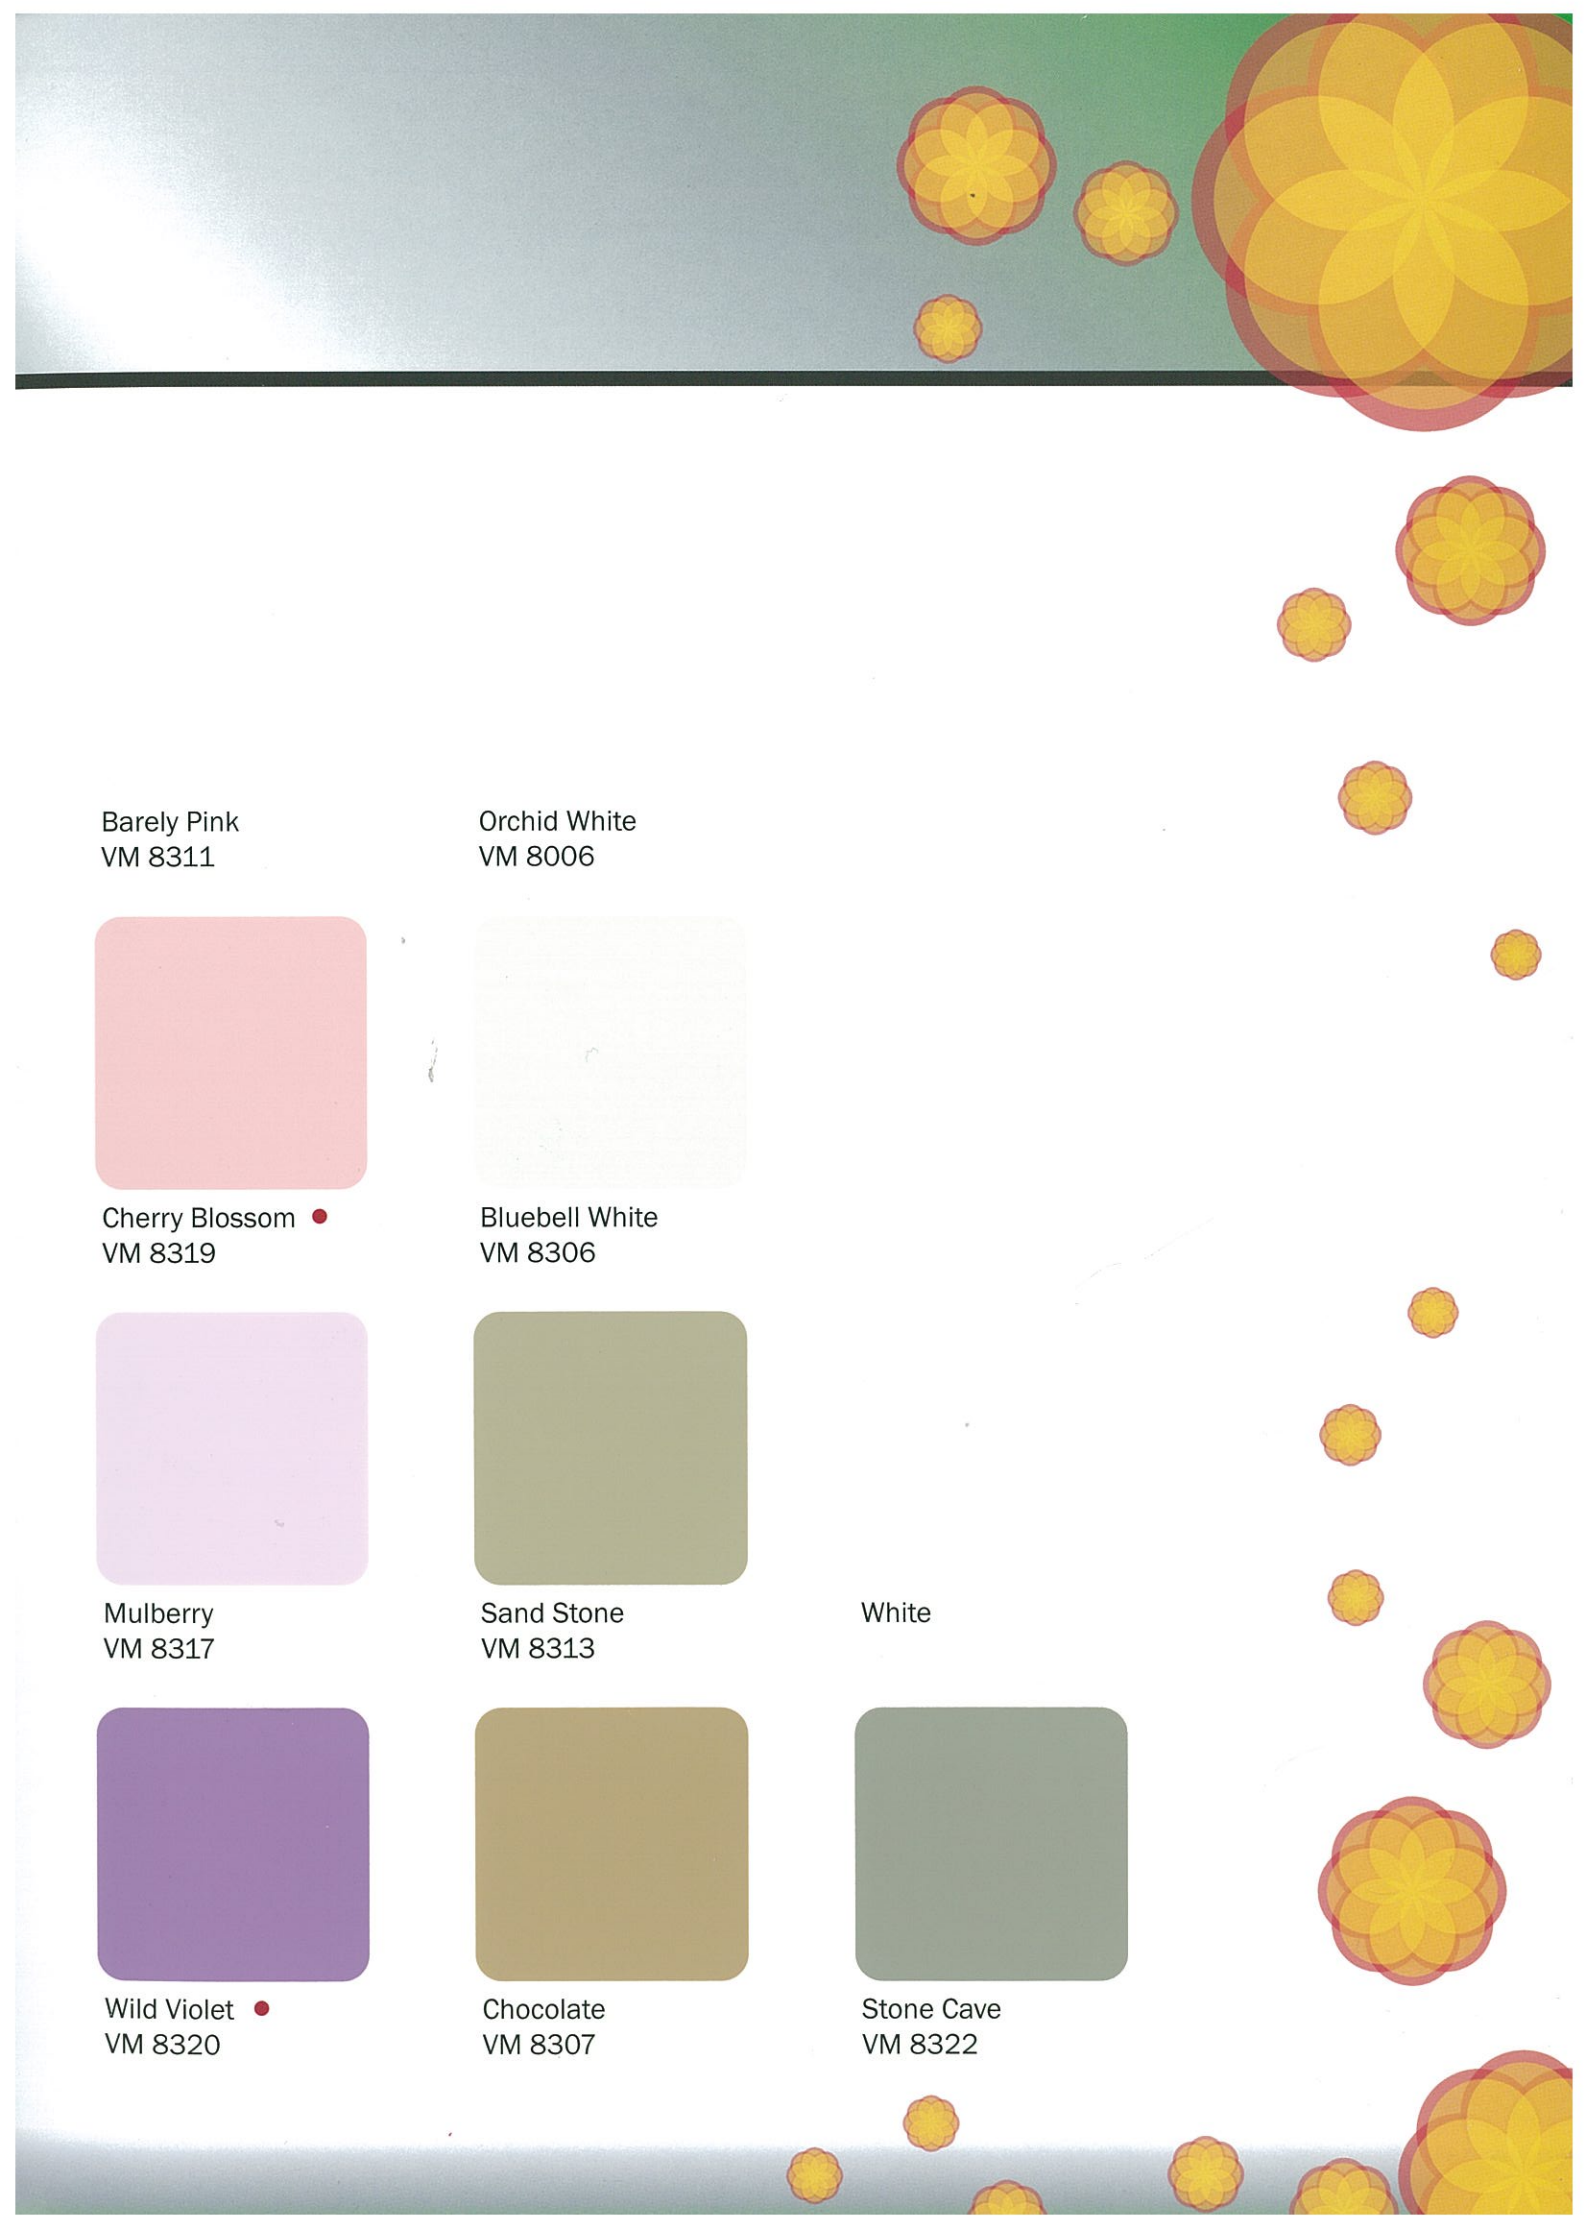



VINYL MATT

MATT FINISH EMULSION PAINT



Low V.O.C



Washable

CHARACTERISTICS

- ▶ Dries quickly to a flat, tough film
- ▶ Good resistance against oil, alkali, grease
- ▶ Excellent colour retention and durability
- ▶ Fungus resistance
- ▶ Good hiding power
- ▶ Good adhesion strength

USES

Used as a finishing coat for interior wall surfaces and it is suitable as a topcoat for multi-layer coatings.

AREA OF APPLICATION

Suitable for primed surfaces of interior concrete, plaster, masonry, PC panel, GRC panel, hard and soft boards, timber etc.

SURFACE PREPARATION

Surface shall be dry and free from dirt, dust, oil, grease and foreign matter. Surface unevenness, cracks etc. shall be made well with SKK cementitious filler.

APPLICATION DATA

Coverage	: 6 to 9m ² / Liter / Coat (Theoretically)
Dilution	: 0 - 10% by weight with water, if necessary
Over Coating Interval	: 2 hours
Method of Application	: By brush, roll or spray

MATERIAL HANDLING

Store the materials in a cool and dry place. Keep away from direct sunlight. Ensure adequate ventilated during application. Avoid contact with skin or eyes. Any skin or eye contamination should be washed immediately with plenty of water and seek medical treatment. If swallowed, seek medical advice immediately. Do not induce vomiting. Keep away from heat sources.



032 - 020
Environmentally Friendly
Low VOC Paint



CERT NO: 92-2-0074
SS ISO 9001 : 2000
Management System Certified